

ARTICLE

Modeling Tensile Strength of Concrete on Partial Replacement of Cement and Sand with Quarry Dust Ground Granulated Blast Furnace and Slag Silica Fumes

Eluozo S.N.^{2*} Dimkpa K.¹

1. Department of Architecture, Faculty of Environmental Science, Rivers State University, Nkpulu Oroworukwo, Port Harcourt, Nigeria

2. Department of Civil Engineering, College of Engineering, Gregory University Uturu (GUU), Abia State, Nigeria

ARTICLE INFO

Article history

Received: 8 March 2021

Accepted: 25 April 2021

Published Online: 15 May 2021

Keywords:

Modeling tensile quarry dust ground granulated
Blast furnace
Slag and silica fumes

ABSTRACT

Tensile strength of concrete were examined on its partial replacement of cement and sand using ground granulated blast furnace and quarry dust. The study examines its behaviour at different dimensions. This is to monitor the variation effect of these parameters on the growth rates of tensile to the optimum curing age. These include non linear conditions of tensile state, non-elastic and its brittle behaviour at all times as it express zero conditions in tension. This means that it has the ability to with stand pull force. It also reflects its weak ability to handle shear stress thus tends to cause deformation in material as it has poor elasticity. The reflection of its brittle influence the rate of tensile behaviour from concrete ductility. These are known to be a material on modern mechanics of concrete. These are also considered as quasi brittle material. This behaviour was reflected as the system considered evaluating the growth rate of tensile strength that replaced cement and sand with these locally sourced additives. The developed model monitor other reflected influential parameters such as variation of concrete porosity due it compaction in placements, tensile behaviour reflects these effect that subject it to mechanical properties of concrete. The study expressed the reaction of these parameters in the simulation, the evaluation of these affected the details variation of tensile growth rate at different water cement ratios and curing age. The tensile behaviour that was monitored are based on these factors in the study. The derived model were validated with the a researcher results [24], and both parameters developed best fits correlation. The study is imperative because the system expressed the behaviour of tensile strength from concrete at different dimensions. Experts can applied these concept to monitor tensile behaviour considering these parameters in its growth rates.

1. Introduction

An observation was made through investigation carried to identify substitute material to sand; these are known to

be fine aggregates that generated green concrete [1,2,3,4,5]. These types of study's findings have developed conditions desirable to the application of waste by-product to produce high tensile strength from high strength concrete.

**Corresponding Author:*

Eluozo S.N.,

Department of Civil Engineering, College of Engineering, Gregory University Uturu (GUU), Abia State, Nigeria;

Email: ndusolo2018@gmail.com

These materials are available and obtain cheap in localities. Thus it has made the waste by-products environmentally friendly, more so the substitutes for cement and river sand are now preferably by-products. In order to conquer this crisis, the replacements of river sand with QD were applied that proof to be an economical alternative in the construction industries [6,7,8,9,10]. The development of green concrete generations was overcome through this crisis that was mentioned above. [5,8,11,12] the generation of tensile strength is basically reflected from the tensile behaviour of the material as concrete formation. The application of these materials such as Fly Ash (PFA) Silica Fume (SIL-ICA) including the addition of 100 % quarry dust (QD) as partial replacement for fine aggregates was accessed by these experts [10,8,13,15]. This study also was illustrated by these researchers [11,14,15,17]. It explained progressive success of these materials by dosage that is up to 20% of sand. The observation expressed their various high rates of effective replacement using quarry dust in traditional concrete. More so these researchers [15,16,19,20], explained the use of quarry waste as a substitute for sand in construction industries. It has definitely resolve the environmental problems that is caused by large-scale depletion of the natural sources such as river sand and it rates of mining [18,19,20,21,22,23].

2. Theoretical Background

$$\frac{dc_d}{dx} + V(y)c_d = \Phi(y)c_d^n \tag{1.0}$$

Dividing equation (1.0) all through by we have

$$c_d^{-n} \frac{dc_d}{dx} + v(x)c_d^{1-n} = \Phi(y) \tag{1.1}$$

Let

$$P=c_d^{1-n} \tag{1.2}$$

$$\frac{dp}{dy} = (1 - n)c_d^{-n} \frac{dc_d}{dy}$$

$$c_d^{-n} \frac{dc_d}{dy} = \frac{1}{1-n} \frac{dp}{dy} \tag{1.3}$$

Substituting equation (1.2) and (1.3) into equation (1.1) we have that

$$\frac{1}{1-n} \frac{dp}{dy} + V(y)p = \Phi(y) \tag{1.4}$$

Integrating both sides we have

$$p = \frac{\Phi(y)}{Vu(y)} + Ae^{-Vu(y)(1-n)y} \tag{1.5}$$

Substituting equation (1.2) into equation (1.13) we have

$$c_d^{1-n} = \frac{\Phi(y)}{Vu(y)} + Ae^{-Vu(y)(1-n)y} \tag{1.6}$$

3. Materials and Method

Testing machine

Three cylinders (φ150 mm & 300 mm in height)

6-A jig for aligning concrete cylinder and bearing strips

Prepare three cylindrical concrete specimens following the same steps as test No.32.

1. After moulding and curing the specimens for seven days in water, they can be tested.

2. Two bearings strips of nominal (1/8 in i.e. 3.175 mm) thick plywood, free of imperfections, approximately (25 mm) wide, and of length equal to or slightly longer than that of the specimen should be provided for each specimen.

3. The bearing strips are placed between the specimen and both upper and lower bearing blocks of the testing machine or between the specimen and the supplemental bars or plates.

4. Draw diametric lines an each end of the specimen using a suitable device that will ensure that they are in the same axial plane. Centre one of the plywood strips along the center of the lower bearing block.

5. Place the specimen on the plywood strip and align so that the lines marked on the ends of the specimen are vertical and centered over the plywood strip.

6. Place a second plywood strip lengthwise on the cylinder, centered on the lines marked on the ends of the cylinder.

7. Apply the load continuously and without shock, at a constant rate within, the range of 689 to 1380 kPa/min splitting tensile, stress until failure of the specimen.

8. Record the maximum applied load indicated by the testing machine at failure. Note the type of failure and appearance of fracture.

3.1 Observations and Calculations

Calculate the splitting tensile strength of the specimen as follows:

$$T = 2P/Ld$$

Where: T: splitting tensile strength, N/mm²P: maximum applied load indicated by testing machine, NL: Length of the specimen, mmd: diameter of the specimen, mm

4. Results and Discussion

Table 1. Predictive and Experimental Values of Split Tensile Strength at Different Curing Age

Curing Age	Predictive Values of Tensile Strength	Experimental Values of Tensile Strength I
4	1.310212078	1.5
7	4.686365818	4.1
14	6.166288899	6.8
28	8.315436384	8.3
35	8.568282079	9.4
42	8.837108749	10.13
49	9.123683856	10.6
56	9.934873977	9.7

Table 2. Predictive and Experimental Values of Split Tensile Strength at Different Curing Age

Curing Age	Predictive Values of Tensile Strength	Experimental Values of Tensile Strength I
4	1.310212078	2.72
7	4.686365818	3.62
14	6.166288899	5.51
28	8.315436384	8.408
35	8.568282079	9.416
42	8.837108749	10.13
49	9.123683856	10.55
56	9.934873977	10.676

Table 3. Predictive and Experimental Values of Split Tensile Strength at Different Curing Age

Curing Age	Predictive Values of Tensile Strength [W/C -0.30]	Experimental Values of Tensile Strength [[W/C -0.30]
4	1.309637442	2.703
7	4.660702747	3.606
14	6.125799668	5.503
28	8.310856023	8.415
35	8.562687694	9.43
42	8.830561307	10.151
49	9.116248222	10.578
56	9.919379192	10.711

Table 4. Predictive and Experimental Values of Split Tensile Strength at Different Curing Age

Curing Age	Predictive Values of Tensile Strength	Experimental Values of Tensile Strength I
4	1.269450029	1.25
7	3.994432574	3.87
14	4.94859046	4.58
28	7.373912408	7.11
35	7.767119794	7.69
42	8.20816596	8.19
49	8.336637998	8.74
56	8.468705713	8.82

Table 5. Predictive and Experimental Values of Split Tensile Strength at Different Curing Age

Curing Age	Predictive Values of Tensile Strength	Experimental Values of Tensile Strength I
4	1.269450029	1.08176
7	3.994432574	2.29787
14	4.94859046	4.52296
28	7.373912408	7.03568
35	7.767119794	7.69375
42	8.20816596	8.19992
49	8.336637998	8.73941
56	8.468705713	9.49744

Table 6. Predictive and Experimental Values of Split Tensile Strength at Different Curing Age

Curing Age	Predictive Values of Tensile Strength [W/C-0.30]	Experimental Values of Tensile Strength [W/C-0.30]
4	1.267957163	1.583
7	3.961863271	2.441
14	4.894731436	4.233
28	7.368710289	6.935
35	7.760931679	7.845
42	8.201135787	8.461
49	8.328485787	8.783
56	8.459451226	8.811

Table 7. Predictive and Experimental Values of Split Tensile Strength at Different Curing Age

Curing Age	Predictive Values of Tensile Strength	Experimental Values of Tensile Strength
4	1.276826798	1.31
7	2.049100537	2.17
14	3.677452951	3.69
28	6.275314888	6.22
35	6.417774823	7.42
42	6.565956913	8.25
49	6.72031797	8.89
56	7.285212087	7.76

Table 8. Predictive and Experimental Values of Split Tensile Strength at Different Curing Age

Curing Age	Predictive Values of Tensile Strength	Experimental Values of Tensile Strength
4	1.276826798	1.287
7	2.049100537	2.031
14	3.677452951	3.627
28	6.275314888	6.231
35	6.417774823	7.239
42	6.565956913	8.051
49	6.72031797	8.667
56	7.285212087	9.087

Table 9. Predictive and Experimental Values of Split Tensile Strength at Different Curing Age

Curing Age	Predictive Values of Tensile Strength [W/C-0.30]	Experimental Values of Tensile Strength [W/C-0.30]
4	1.276252162	1.1646
7	2.047872245	1.9044
14	3.67288332	3.4626
28	6.269007256	5.8734
35	6.409971784	6.726
42	6.556702426	7.3434
49	6.709661505	7.7256
56	7.265147297	7.8726

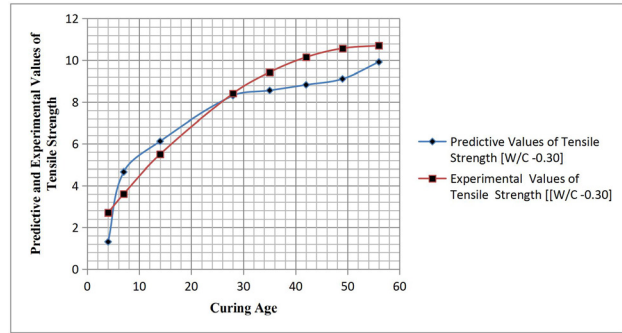


Figure 3. Predictive and Experimental Values of Split Tensile Strength at Different Curing Age

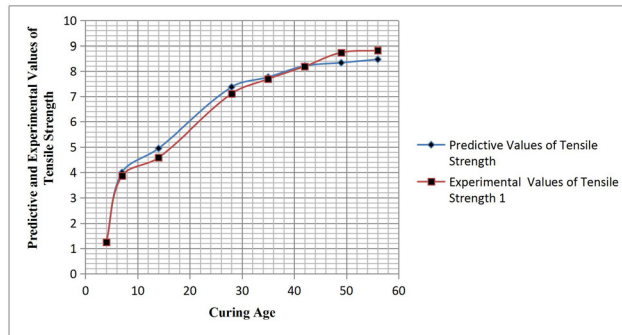


Figure 4. Predictive and Experimental Values of Split Tensile Strength at Different Curing Age

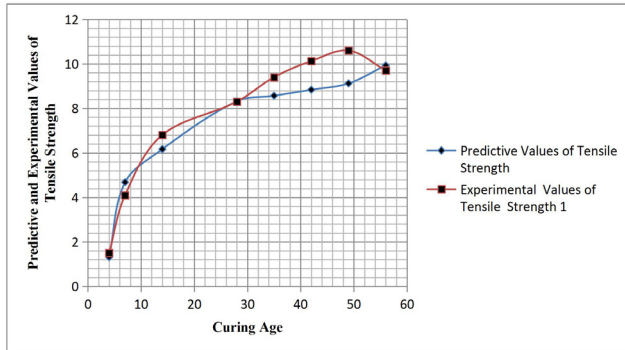


Figure 1. Predictive and Experimental Values of Split Tensile Strength at Different Curing Age

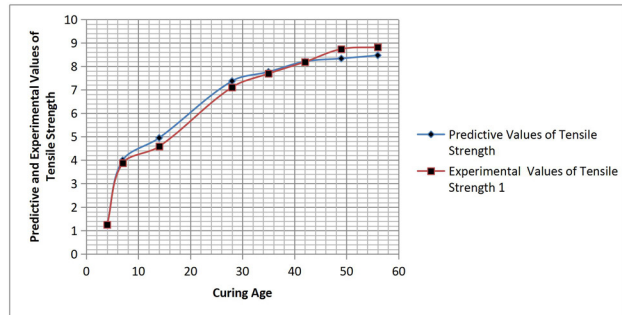


Figure 5. Predictive and Experimental Values of Split Tensile Strength at Different Curing Age

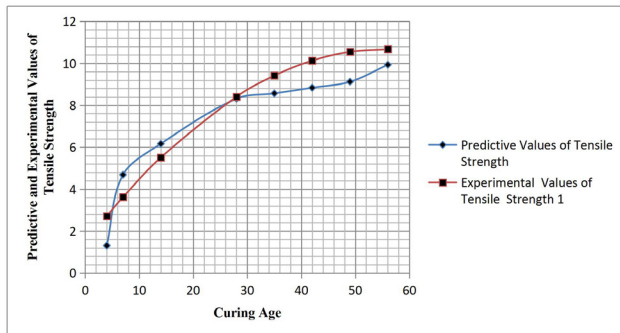


Figure 2. Predictive and Experimental Values of Split Tensile Strength at Different Curing Age

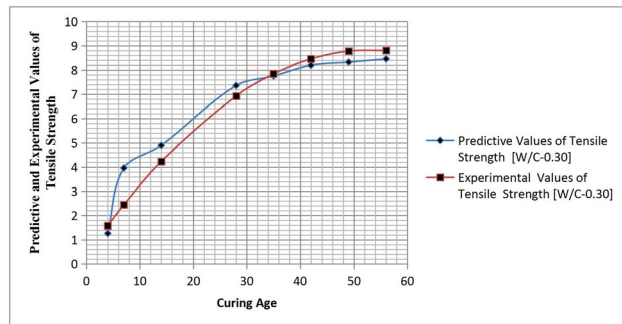


Figure 6. Predictive and Experimental Values of Split Tensile Strength at Different Curing Age

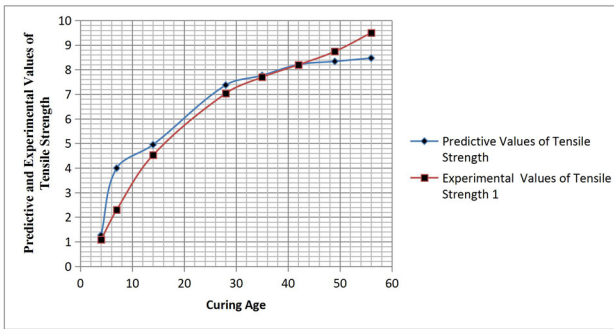


Figure 7. Predictive and Experimental Values of Split Tensile Strength at Different Curing Age

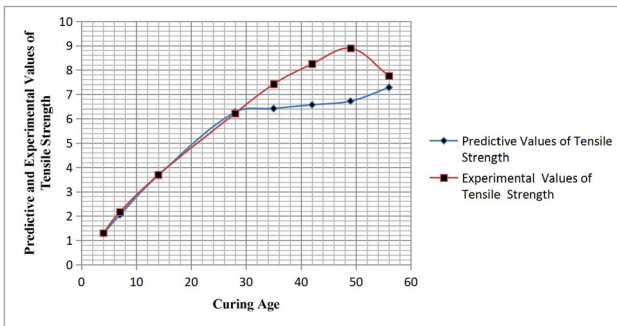


Figure 8. Predictive and Experimental Values of Split Tensile Strength at Different Curing Age

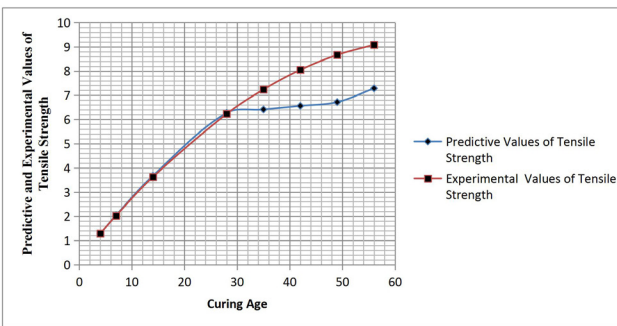


Figure 9. Predictive and Experimental Values of Split Tensile Strength at Different Curing Age

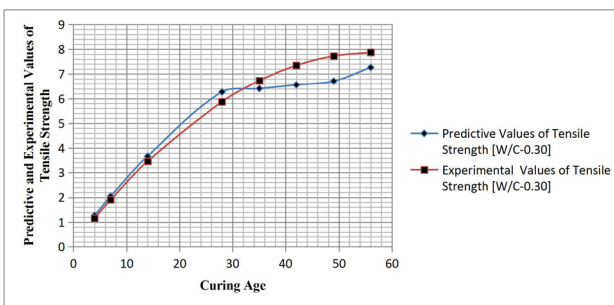


Figure 10. Predictive and Experimental Values of Split Tensile Strength at Different Curing Age

Figure one to ten show the variation growth rate of tensile strength from the concrete grades. The tensile from this design concrete grades reflects the output of the model concrete that were partially sand and cement with quarry dust granulated blast furnace and silica fumes. The materials developed the required tensile strength based on the additive applied and quarry dust used, the behaviour of these materials reflect the variation growth in concrete tensile. The exponential increase in strength observed, shows the gradual strength attained from the improved setting time of the materials. Such by-product integrated to obtained the required tensile behaviour of the material that expressed the variation of the mechanical properties generated from the concrete formation, since tensile strength is important properties due to its vulnerable to tensile cracking at different influence on applied load. This condition influence the behavior of the tensile rate of the concrete based on the reflection from the applied additive and quarry dust as partial replacements for sand and cement. This also shows the variation in performance as reflected in the trend whereby the tensile experienced slight fluctuation based on these stated factors. The tensile known to be ability to withstand pull force, the trend in all the figures observed gradual growth rate with slight fluctuation based on the compaction variation of the concrete at different placement. These were observed to reflect on its tensile strength. The behaviour of the growth rate also was influenced by the percentage variation of concrete porosity through the heterogeneity of compaction on different mix design.

5. Conclusions

The study has definitely examined various trends of tensile growth rates. These are developed from significant considered property of concrete, because structure is highly vulnerable to tensile cracking. This observation is known to be due to various kinds of influence and the applied loading, however tensile strength of concrete is very low compared to its compressive strength. The behaviour of tensile strength from concrete structure are basically from its mechanical properties. These properties includes shrinkage and creep, compressive strength, flexural strength, modulus of elasticity and the concrete tensile. The study carried out from variations of tensile affects concrete that partially replace sand and cement with additives. These were monitored effect considering these partial replacements. The study examined the behaviour of tensile from concrete structure based on the facts that these materials is non linear, non elastic and brittle, due to its strong in compression and weak in tension, the behaviour of tensile strength growth from these partial

replacement determined its variations on performance. These are to examine the materials based of the dosage of partial replacements on the additives for cement, the derived model that monitor the heterogeneity from tensile strength generated the theoretical values from the simulation. The parameters that reflect concrete behaviour were considered in the system. The influence of these parameters was observed on the tensile behaviour, the predictive values were compared with experimental values, and both parameters developed best fits correlation.

References

- [1] Ankit Nilesh Chandra Patel, Jayesh Kumar Pitroda, (2013). Stone Waste: Effective Replacement of Cement for Establishing Green Concrete, *Inter. J. Innovative Tech. And Exploring Engineering*, 2(5): 24-27.
- [2] Berry, E. E, Hemmings R. T., and Cornelius B. J. (1990). Mechanisms of Hydration Reactions in High Volume Fly Ash Pastes and Mortars. *Concrete Composites*, 12: 253-261.
- [3] Felekoglu, B. (2007). Utilization of High Volumes of Limestone Quarry Wastes in Concrete Industry (Self-Compacting Concrete Case). *Resources, Conserv. Recycling*, 51: 770-791.
- [4] Freeda Christy, C., and Tensing D. (2010). Effect of Class-F Fly Ash as Partial Replacement with Cement and Fine Aggregates In Mortar. *Indian Journal of Engineering and Materials*. 17:140-144.
- [4] Hameed, and Sekar. (2009). Properties of Green Concrete Containing Quarry Rock Dust and Marble Sludge Powder as Fine Aggregate.
- [5] Hmaid Mir, A. (2015). Improved Concrete Properties Using Quarry Dust as Replacement for Natural Sand. *International Journal of Engineering Research and Development*, 11(3): 46-56.
- [6] Ho, D. W. S., Sheinn A. M. M., Ng, C. C. and Tam C. T. , (2002). The use of Quarry Dust for SCC. *Applications. Cement and Concrete Research*. 32(4): 505-511.
- [7] Hussin, M. W. (2002). Strength Properties of Self-Compacting Mortar Mixed with GGBFS. *ICE-Construction Materials*; 165(2):87-98.
- [8] Ilangovan, R., Mahendran, N. and Nagamani, K. (2008). Strength and Durability Properties of Concrete containing Quarry Rock Dust as Fine Aggregates. *ARPN Journal of Engineering and Applied Science*. 3(5): 20-26.
- [9] Linoshka, S.P., and Hwang. (2016). Mix design and Pollution Control Potential of Pervious Concrete with Non-compliant Waste Fly ash, *Journal of Environmental Management*. 176:112-118.
- [10] Lohani, T. K., Padhil M., Dash K. P., and Jena S. (2012). Optimum Utilization of Quarry Dust as Partial Replacement of Sand in Concrete. *Inter. Journal of Applied Sciences*. 1(2): 391.
- [11] Malhotra, V. M. (2011) *Fly Ash in Concrete*. Canada. Dept. of Energy, Mines and Resources the University of California. Digitized (pp 178).
- [12] Manassa, J. (2010). Use of Crushed Granite Fine as Replacement to River Sand in Concrete. *Leonardo Electronic Journal of Practices and Technologies*. 17:85-96.
- [13] Mangiru, G. N., Karugu, C.K., Oyawa, W.O., Abuodha, S.O., and Mulu P.U. (2013). Partial Replacement of Natural River Sand with Crushed Rock Sand in Concrete Production. *Global Engineers & Technologist Review*. 3(4):7-14.
- [14] Mohammad Iqbal Malik, Syed Rumysa Jan, Junaid A. Peer, S., Azhar Nazir, Khubbab Fa Mohammad. (2015). Study of Concrete Involving Use of Quarry Dust as Partial Replacement of Fine Aggregates. 5(2): 2278-8719.
- [15] Peter, A. C. (2016). Chapter 21-Concrete mix Design. *Civil Engineering Materials*, 201-217. Poonam, Anoop Bishnoi, and Manju Bala. (2015). Effect of Quarry Dust as Partial Replacement of Sand in Concrete. *International Journal of All Research Education and Scientific Methods* 3(6):1-5.
- [16] Raharjo, D., Subakti, A., and Tabvio. (2013). Mixed Concrete Optimization using Fly Ash, Silica Fume and Iron Slag on the SCC's Compressive Strength. *Procedia Engineering*, 54: 827-839.
- [17] Safiuddin, M., Raman, S. N., Zain, M. F. M. (2007). Flowing Concretes with Quarry Waste Fine Aggregate. *J. Civil Eng. Res. Pract.*, 4(1): 17-25.
- [18] Safiuddin, M., Zain, M. F. M., and Yusof, K. M. (2000a). Utilization of quarry dust in developing high performance concrete. In D.
- [19] McTavish, G. Knights, F. M. Bartlett, R. K. Rowe, and S. Easa (Eds.), 2000 Annual Conference Abstracts - Canadian Society for Civil Engineering (pp. 233).
- [20] Safiuddin, M, Zain, M. F. M, Yusof, K. M. (2000b). Development of High Performance Concrete Using Quarry Dust as a Partial Replacement of Sand. In: *Proceedings of the PCI/FHWA/FIB International Symposium on High Performance Concrete*, Orlando, Florida, USA. pp. 173-182.
- [21] Sivakumar, A., and Prakash, M. (2011). Characteristic studies on the mechanical properties of quarry dust addition in conventional concrete. *Journal of Civil Engineering and Construction Technology*. 2(10): 218-235.

- [22] Sukesh, C., Krishna, K. B., Sai Teja, P. S. L., and Rao, J. K. (2013). Partial Replacement of Sand with Quarry in Concrete. *Int. Journal of Innovative Technology and Exploring Engineering*. 2(6): 254- 258.
- [23] Teychene, D. C., Franklin, R. E. and Erntroy, H. C. (1992). *Design of Normal Concrete Mixes*. Second edition,. Bre press, Watford, Herts, WD2 7QG, pp.1-46.
- [24] Venkata Sairam Kumar, N., Panduranga Rao, B., and Krishna Sai M. L. N. (2013). Experimental Study on Partial Replacement of Cement with Quarry Dust. *International Journal of Civil Engineering and Technology (IJCET)*, 2(3): 136-137.
- [25] Jaharatul D K L A, Nazri A, Roslli N M1 & Mohammed M.A (2018): the effect of quarry dust with cement by-products on properties of concrete *Malaysian Journal of Civil Engineering* 30(3):415-428 (2018).